

Micro Signal Type Tester


II. TH2684/TH2684A High Precision IR Tester

Features

- 320×240 dot-matrix LCD
- Powerful charging function
- High speed measurement:100meas/sec
- High measurement accuracy:±2% (< 1TΩ)
- Contact detection function for capacitive components
- Measurement range:TH2684 : 10kΩ to 50TΩ
TH2684A: 10kΩ to 100TΩ
- Ultra-low leakage current test: minimum current is 10pA, accuracy: 2% ±2pA
- Measurement voltage:
TH2684: 10V – 500V, dual-output
TH2684A:10V–1000V,single-output
- Dual outputs (precharge voltage output and test voltage output) can be set.
- The precharge voltage output can be set to follow the test voltage output and can be finely adjusted on test voltage. Also the precharge voltage can be set to work in independent mode.
- When the test current is less than 10nA, the internal input impedance can be selected between 10kΩ and 1MΩ to ensure rapid and accurate test.
- TH2684 charge current:2mA , 25mA, 200mA selectable
TH2684A charge current:2mA , 25mA , 100mA selectable
- 7 current ranges, manual or auto range mode
- 4-bin comparison function
- Programmable sequence test mode
- R-T and I-T Curve test and display mode
- Auto store setup parameters
- Screen hardcopy to be saved as BMP file to a U disk
- Automatically upgrade firmware by a U disk
- Selectable Chinese and English operation interfaces
- Achieve automatic test system by Handler interface
- Achieve remote control by RS232C and USB Device interface
- Support scanning interface for mass tests

Application

- Ultra-High Value Resistors
- Insulation resistance and leakage current of capacitors
- Various dielectric insulating materials, equipment, wires and cables
- Insulation testing from safety regulations
- Work as high voltage DC power supply

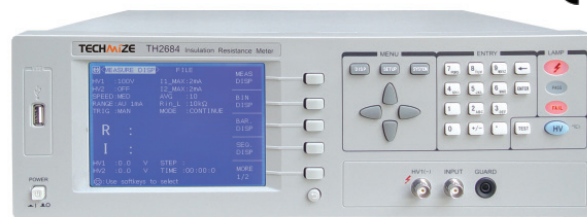

RS232	USB HOST	USB DEVICE	HANDLER	SCANNER	GPIB
standard	standard	standard	standard	standard	option

TH2684/A

Dimension(mm):400(W)×130(H)×430(D)

Weight:14kg / 10kg

Brief Introduction

■ TH2684/TH2684A High Precision IR Tester is an intelligent measurement instrument that is used for rapid measurements on IR properties of electronic parts and components, dielectric materials, equipments, cables, etc. Large LCD and user friendly menu provide you easier operation.

This instrument is especially designed for capacitor IR test TH2684/TH2684A can achieve rapid measurements through following methods:

① Selectable internal input impedance: If the current is greater than 10nA, only 10kΩ input impedance can be used; if the current is below 10nA, you can choose 10kΩ or 1MΩ impedance to test.

② With the built-in dual voltage output, TH2684 can charge large capacitors. By dual voltage output, TH2684 is able to output a precharge voltage up to 500V, 200mA. In voltage follow mode, precharge voltage follow with the test voltage output and can be finely adjusted. Above features ensure the perfect charge of capacitive materials.

③ TH2684A can output a voltage of 1000V, 100mA to fully charge the capacitive material.

In addition, user can program the sequence measurement steps (up to 18 steps) on TH2684/TH2684A. For instance, charge, wait, test, and discharge steps can be programmed. Each step can last up to 100s.

TH2684/TH2684A has a unique contact detection function. For capacitive material such as capacitors and cables, contact detection function can detect the contact of components under test. Moreover, this detection function will not increase any test time.

TH2684 equips with interfaces of RS232, USB DEVICE, SCANNING and Handler. Handler interface provide convenience for automatic test system; SCANNING interface is useful for mass measurement of components. User can use a scanner to speed measurement of components.

Micro Signal Type Tester

II. TH2684/TH2684A High Precision IR Tester

Specifications

Model	TH2684	TH2684A
Resistance test		
Range	10 kΩ to 50TΩ	10 kΩ to 100TΩ
Accuracy	Test current > 100pA: 2% Test current ≤ 100 pA: 2% ± Vtest/2pA	
Current test		
range	Range 1 :100uA – 1mA ; Internal Input impedance 10 kΩ	
	Range 2 :10uA – 100uA ; Internal Input impedance 10 kΩ	
	Range 3 :1uA – 10uA ; Internal Input impedance 10 kΩ	
	Range 4 :100nA – 1uA ; Internal Input impedance 10 kΩ	
	Range 5 :10nA – 100nA ; Internal Input impedance 10 kΩ	
	Range 6 :1nA – 10nA ; Internal Input impedance 10 kΩ or 1MΩ (selectable)	
	Range 7 :10pA – 1nA ; Internal Input impedance 10 kΩ or 1MΩ (selectable)	
Accuracy	2% ± 2pA	
Measurement voltage		
Range	10 to 500V, 1V resolution	10 to 1000V, 1V resolution
Accuracy	1% ±1V	
Source resistance	200Ω	
Current limit	2,25,or 200mA	2, 25 , or 100mA
Voltage Output	Manually turn on or off on front panel, or controlled by built-in timer, or by remote control.	
Timing	Programmable charge time: 0 to 1000s	
Measurement delay	0 to 1000s programmable	
Discharge resistance	2kΩ	
Discharge time	t = 0.03 x Cx (in μF), when Vtest falls to 1% of the test level.	
Measurement speed		
Trig mode	Single measurement: < 100ms(exclude charge time) Average up to 100 measurements:<100 + (N-1) x 100 ms (exclude charge)	
Continuous mode	Direct readout: 100ms – 10000ms depending on average number	
Comparator	4 bins:(3 bins for PASS,1 bin for FAIL)	
Range mode	Auto, Hold	
Average times	1 to100	
Memory	20 sets of setup values can be stored.	

General Specifications

Operating temperature and humidity	10°C - 40°C, ≤90%RH
Power supply	90 to 130 V AC(60Hz) or 198 to 260V AC(50HZ)
Power consumption	TH2684 : 250W TH2684A: 150W